


**EJECTOR PIN 'A' TYPE**

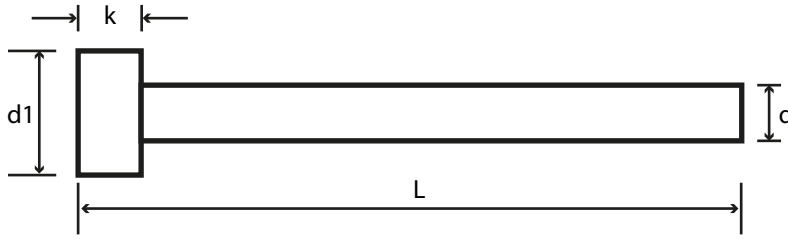

STRAIGHT EJECTOR PIN AS PER DIN 1530

MATERIAL - THROUGH HARDEN SUITABLE FOR PLASTIC MOULDING

HARDNESS - 52 TO 58 HRC

| Dimension |    |     | Length L |     |     |     |     |     |     |     |     |     |     |     |     |
|-----------|----|-----|----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| d         | d1 | k   | 100      | 125 | 160 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 600 | 700 | 800 |
| 1         | 3  | 1.5 | A        | A   | A   | A   | A   | A   |     |     |     |     |     |     |     |
| 1.5       | 3  | 1.5 | A        | A   | A   | A   | A   | A   |     |     |     |     |     |     |     |
| 2         | 4  | 2   | A        | A   | A   | A   | A   | A   | A   | A   |     |     |     |     |     |
| 2.5       | 5  | 2   | A        | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   |
| 3         | 6  | 3   | A        | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   |
| 4         | 8  | 3   | A        | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   |
| 5         | 10 | 3   | A        | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   |
| 6         | 12 | 5   | A        | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   |
| 8         | 14 | 5   | A        | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   |
| 10        | 16 | 5   | A        | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   |
| 12        | 18 | 7   | A        | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   |
| 16        | 22 | 7   | A        | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   |
| 18        | 24 | 8   | A        | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   |     |     |
| 20        | 25 | 8   | A        | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   | A   |